



# Careo 7063



**23 1/2 in x 14 1/4 in or 600 mm x 360 mm**

Technical datasheet




# Careo 7063

WHS: Wood hybrid system



Architectural Eco-Technology

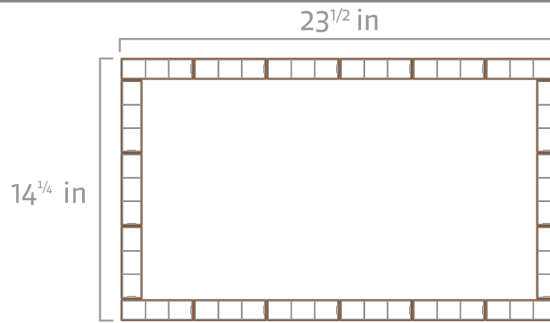

Section tolerances in mm: +/- 2.0 mm or +/- 3/32 in

The outer wpc layer is sanded. The provided dimensions are average thickness (as well for all drawing in that document)

**Fire rating:**

**On request:**

ASTM E-84 class A

Euroclass NF EN 135011 : B, s3-d0

Euroclass NF EN 135011 : A2, s3-d0

NFP 92 -507 : M2 or M1

**Surfaces finish:** Sanded

Other surface textures available on request. Sanding finish and/or shading may vary between runs. WPC thickness may vary in compliance with flame test requirements.

**Profiles fastening and installation:** Check our website [www.geolam.com](http://www.geolam.com)

Technical information may change without warning.

**Standard length:** 9 ft 10 in | 3.0 m

**On order any length from:** 7 ft to 19 ft 8 in | 2.15 m to 6 m

**Weight:** 19.50 lb/ft | 29.10 kg/m

**Core in anodized aluminum alloy:** A6063S-T5 Serie 6000

**Coefficient of Thermal Expansion (20-100°C):**

23.4 µm/m/°C

**Modulus of Elasticity:** 68.9 GPa

**Max Tensile Strength:** 186 Mpa

**Carbon Footprint:**

WPC : 1.54 kg CO<sub>2</sub> /Kg WPC

Alu : 0.87 kg CO<sub>2</sub> /Kg Alu



Teak



Limba



Rosewood



Wenge



Bilinga




Carbon



Ivory



Any color on request

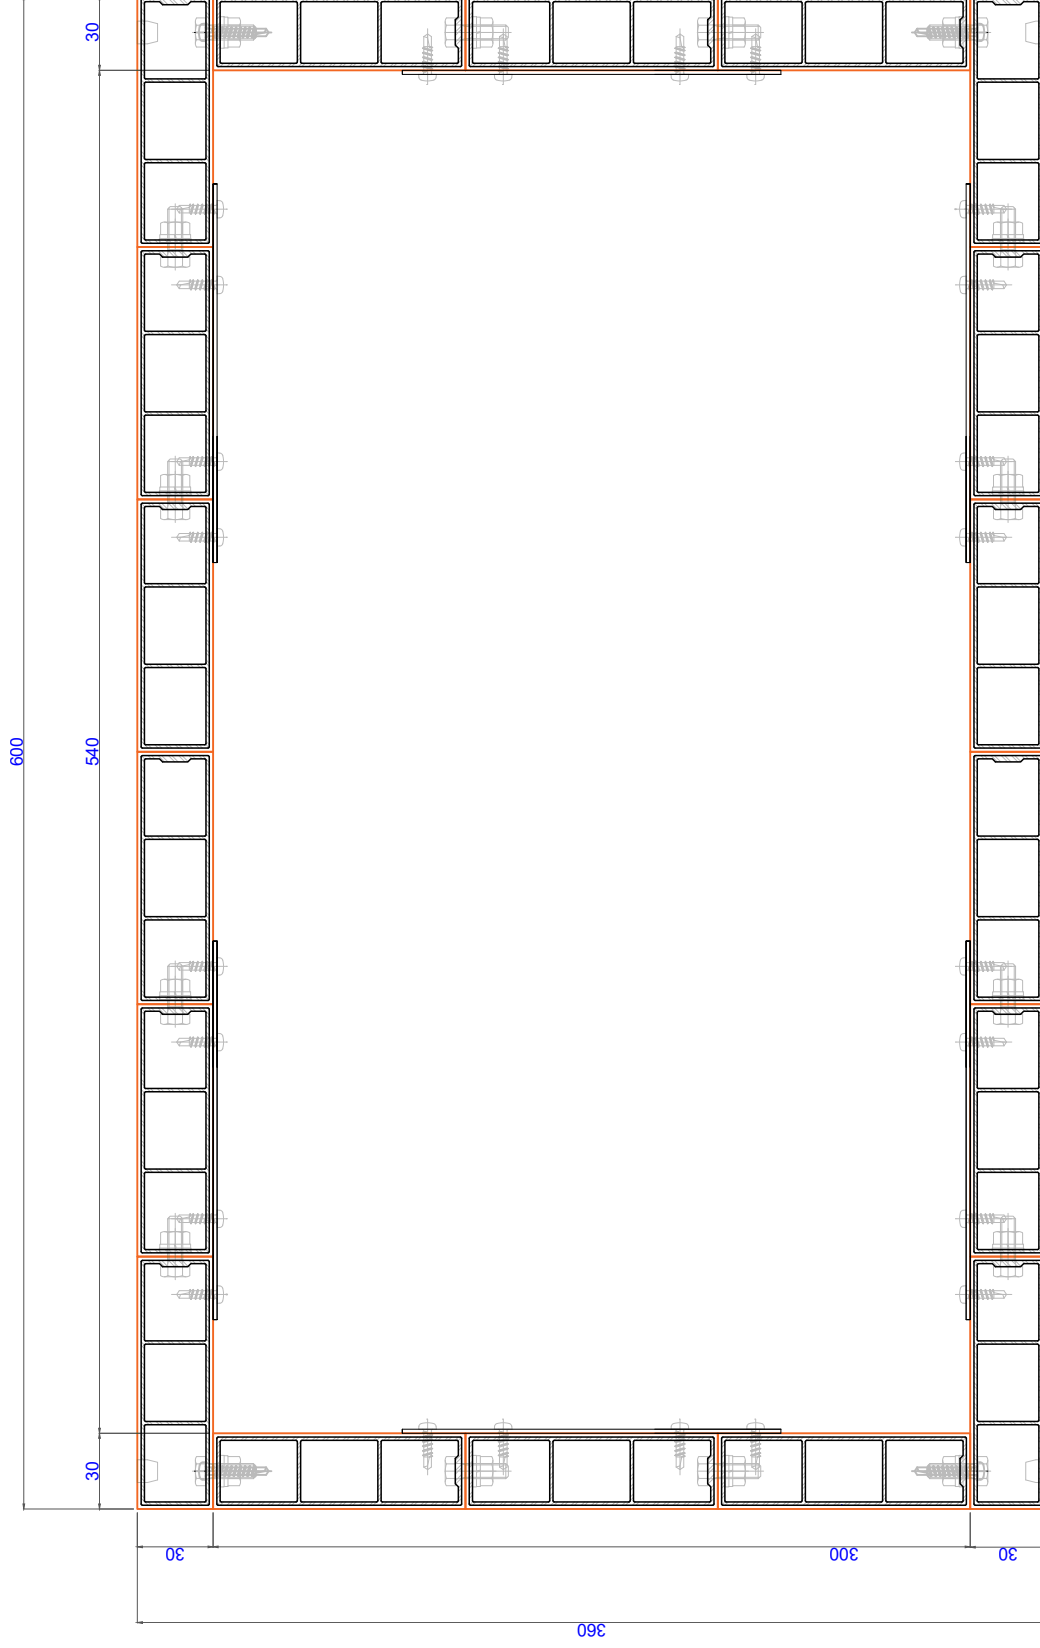

**Technical specifications, dimensions in mm**

|   |      |
|---|------|
| Weight (kg/ml)  | 19.5 |
| Cross section, secondary moment Ix (cm <sup>4</sup> ) |      |
| Cross section, secondary moment Iy (cm <sup>4</sup> ) |      |

|  |  |
|--|--|
| Cross section coefficient Z+x (cm <sup>3</sup> ) |  |
| Cross section coefficient Z-x (cm <sup>3</sup> ) |  |
| Cross section coefficient Z+y (cm <sup>3</sup> ) |  |
| Cross section coefficient Z-y (cm <sup>3</sup> ) |  |

**Wood hybrid system WHS**

Type 1.0

**Careo 7063**



# Assemblage

Éclaté du profilé Careo 7063

